


# M3K

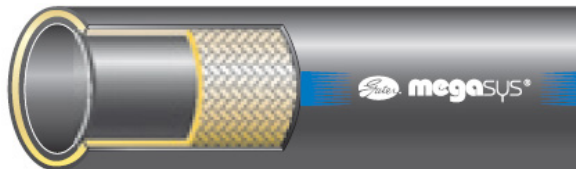

**Inner tube:** black, oil resistant synthetic rubber

**Cover:** black synthetic rubber

**Temperature range:** -40°C to +100°C

**Advantages:**

- higher working and bursting pressure rating compared to earlier versions
- Abrasion, oil and weather resistance

**Applications:**

Agriculture, construction, mining and industrial operations

Part number	ID (mm)	OD (mm)	Working pressure (bar)	Bursting Pressure (bar)	Bending radius (mm)	Weight (kg/m)
5928.12-xx	9,5	16,0	225	900	71,1	0,28
5928.38-xx	12,5	20,2	225	900	76,2	0,41