


PRODOTTI DI CONSUMO PER PART LINER

- RESINE
- FIBRA DI VETRO



RESINA SILICATA

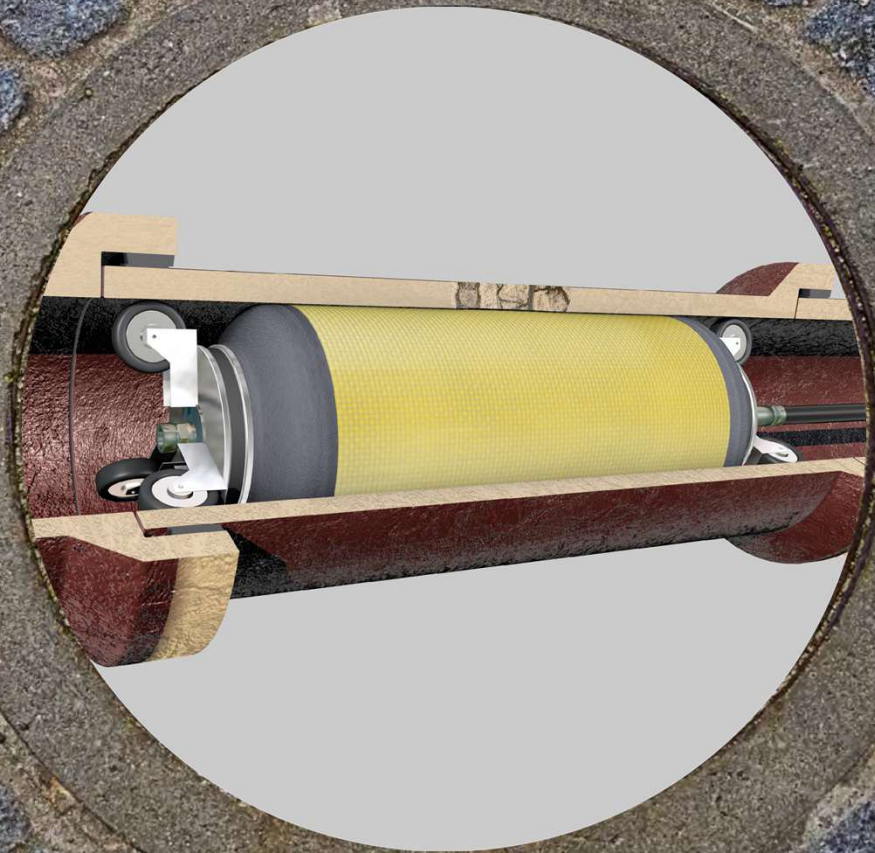

<u>Prodotti</u>	<u>Easy PUR Winter</u>	<u>Easy PUR Summer</u>
Approvazione DIBt	No. Z-42.3-388	No. Z-42.3-388
Scadenza	12 mesi	12 mesi
Tipo resina	Resina silicata bicomponente	Resina silicata bicomponente
Mixing ratio Resina/induritore (per peso)	100 : 200	100 : 200
Pot life	10°C: ~ 12 min 15°C: ~ 10 min 20°C: ~ 8 min	20°C: ~ 15 min 25°C: ~ 12 min 30°C: ~ 8 min
Setting time	10°C: ~ 25 min 15°C: ~ 20 min 20°C: ~ 10 min	20°C: ~ 25 min 25°C: ~ 20 min 30°C: ~ 10 min
Tempo indurimento	10°C: ~ 90 min 15°C: ~ 60 min 20°C: ~ 50 min	20°C: ~ 90 min 25°C: ~ 60 min 30°C: ~ 50 min
Temperatura massima		
Consegna: 31/01/2025	Comp. A 14 kg, comp. B 21kg	Comp. A 14 kg, comp. B 21kg

Fibra di vetro



<u>Prodotti</u>	<u>Fibra di vetro</u>
Approvazione DIBt	No. Z-42.3-388
Materiale	ECR glass 1368 g/m ² ECR glass 1086 g/m ²
Misure disponibili	rotoli largh. diverse: <ul style="list-style-type: none">• 0,38• 0,43• 0,55• 0,66• 1,28 m
Lunghezza rotolo	40 mt

